


Q41F-16-00

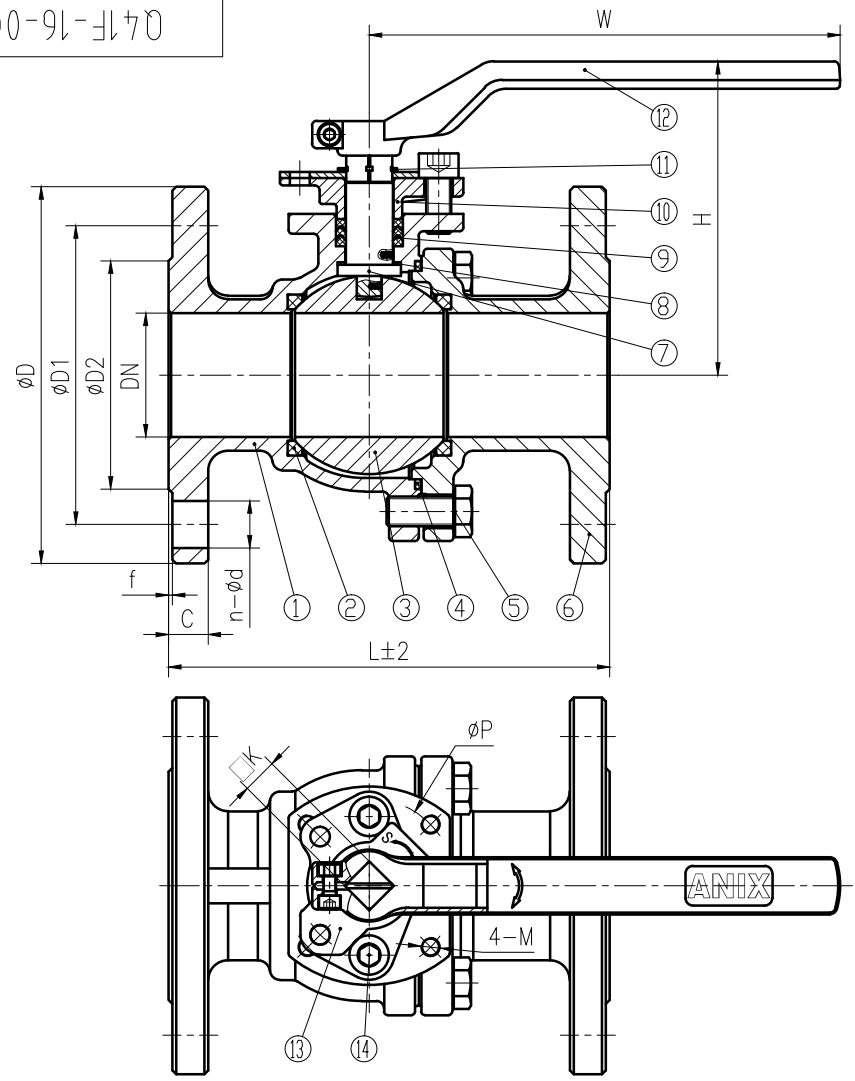

SIZE	L	D	D1	D2	C	f	n-ød	W	H	K	P	M
DN15	115	95	65	45	16	2	4-ø14	130	81	9	42	M5
DN20	120	105	75	58	18	2	4-ø14	130	84	9	42	M5
DN25	125	115	85	68	18	2	4-ø14	160	91	11	50	M6
DN32	130	140	100	78	18	2	4-ø18	160	95	11	50	M6
DN40	140	150	110	88	18	3	4-ø18	200	118	14	70	M8
DN50	150	165	125	102	20	3	4-ø18	200	126	14	70	M8
DN65	170	185	145	122	18	3	4-ø18	240	137	14	70	M8
DN80	180	200	160	138	20	3	8-ø18	270	162	17	102	M10
DN100	190	220	180	158	20	3	8-ø18	320	188	17	102	M10

14	GB/T 70.1-2000	HEXAGON HEAD BOLT		A2-70			
13	Q41F-16-11	Stopper	1	SS304			
12	Q41F-16-10	Handle	1	Stainless Steel			
11	GB/T 894.1-1986	Snap Ring	1	SS304			
10	Q41F-16-09	Gland	1	A351 CF8			
9	Q41F-16-08	Packing		PTFE			
8	Q41F-16-07	Stem Washer	1	PTFE			
7	Q41F-16-06	Stem	1	A276 304/316			
6	Q41F-16-05	Bonnet	1	A351 CF8/CF8M			
5	GB/T 5780-2000	Bolt		A2-70			
4	Q41F-16-04	Gasket	1	PTFE			
3	Q41F-16-03	Ball	1	SS304/SS316			
2	Q41F-16-02	Seat	2	PTFE			
1	Q41F-16-01	Body	1	A351 CF8/CF8M			

CHECKED BY
PRINTED BY
BASED DRAWING NO.
OLD DRAWING NO.
SIGNATURE
DATE

Nominal pressure		PN16					
Test pressure	Shell test	2.4	MPa	test medium	water	Test temperature	normal temperature
	seal test	1.8			air		
	Gas seal test	0.6					
Applicable medium		water,oil,gas					
Applicable temperature		-29~180°C					

NOTE:
1.Design and Manufacture for valve according to DIN 3357-1989.
2.Face-to-face dimensions for valve according to DIN 3202-1984.
3.End flange dimensions for valve according to DIN 2543-2000.
4.Inspection and Test for valve according to DIN 3230-1987.

No.	STANDARD	NAME	Q'TY	MATERIAL	UNIT WEIGHT	TOTAL WEIGHT	REMARKS
GENERAL DRAWING							ANIX VALVE CO.,LTD
							Flange Ball Valve
							Q41F-16-00
MARK QTY.	FILE NO.	SIGNATURE	DATE				
DESIGN		STANDARD		DRAW MARK	WEIGHT	SCALE	
PROOF						1:1	
EXAMINE		APPROVE		TOTAL:	PAGES	NO.:	PAGE
TECHNOLOGY		DATE					